


TOP VIEW  
LADDER CB-RL  
SAFETY RAIL ON RIGHT SIDE

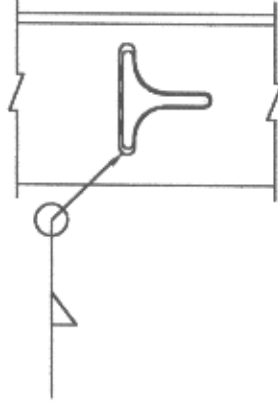

SECTION A-A

**NOTES:**

1. LADDER MEETS OR EXCEEDS ALL OSHA REQUIREMENTS UNDER 1910.27 AND IS LIGHT-WEIGHT AND VERY ECONOMICAL.
2. NET INTERIOR WIDTH BETWEEN LADDER RAILS IS 16".
3. LADDER STEP IS 1-1/4" WIDE FLAT WITH NO-SLIP TREAD.
4. ALL MATERIALS ARE 6061-T6 EXTRUDED ALUMINUM.
5. 20ft LADDER SECTION WEIGHT = 51lbs.
6. FOR USE WITH CB-S2 SAFETY DEVICE.
7. ATTACH SUPPORT BRACKETS AT 7'-0" MAXIMUM SPACING.

CLIMBER'S BUDDY/SUR-LOC, INC.  
P.O. BOX 750 PRINCETON, IN 46737 - (317) 488-4283

THIS DRAWING IS THE PROPERTY OF CLIMBER'S BUDDY/SUR-LOC, INC. IT IS NOT TO BE REPRODUCED, COPIED, OR TANGED IN WHOLE OR IN PART WITHOUT OUR WRITTEN CONSENT.

STANDARD DETAIL	SCALE 1:32	DRN J. NEFF
		APP'D T. SWAGER

TITLE  
CLIMBER'S BUDDY  
ALUMINUM SAFETY LADDER

DATE  
03/06/00

DRAWING NUMBER  
S010-00-1LR